



DETAIL 1
SHARED LANE MARKING WITH
GREEN BACKGROUND
N.T.S.

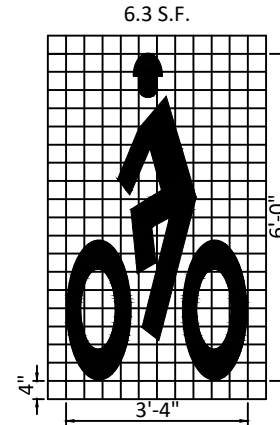

DETAIL 2
HELMETED BICYCLIST SYMBOL
N.T.S.

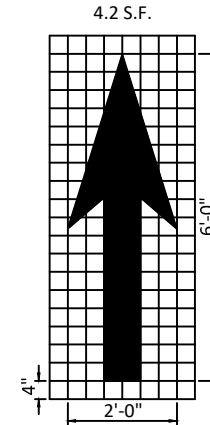


DETAIL 3
BIKE LANE ARROW
N.T.S.


Notes:

1. All bicycle markings and pavement messages shall be white preformed thermoplastic.
2. The preformed thermoplastic markings shall meet state specifications and be approved for use by the city. Green and white preformed thermoplastic markings must be on the FDOT Approved Product List (APL). FDOT Specification 523 for green and Specification 711 for white preformed thermoplastic markings.


LATEST REVISION 2024	BICYCLE PAVEMENT MARKINGS	STANDARD DETAIL
	CITY OF WEST PALM BEACH - ENGINEERING SERVICES	PM-1

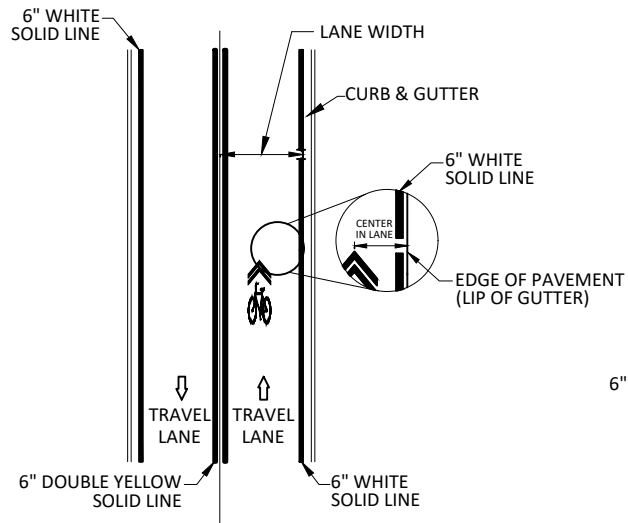

DETAIL 1
SHARED LANE MARKING USE AT LANE WIDTH $\leq 14'$
N.T.S.

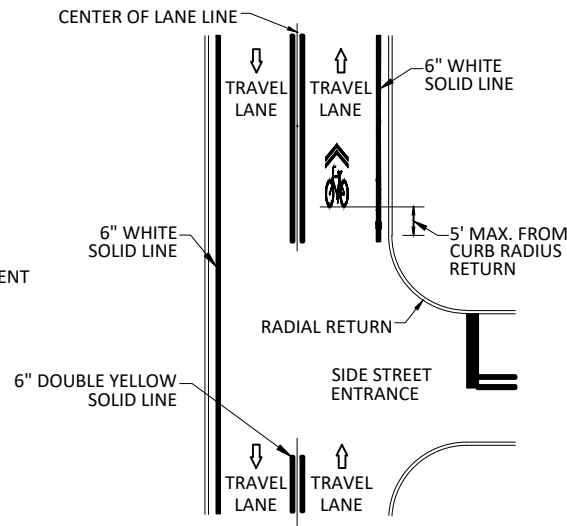


DETAIL 2
SHARED LANE MARKING PLACEMENT
AT FAR SIDE OF THE INTERSECTION
N.T.S.

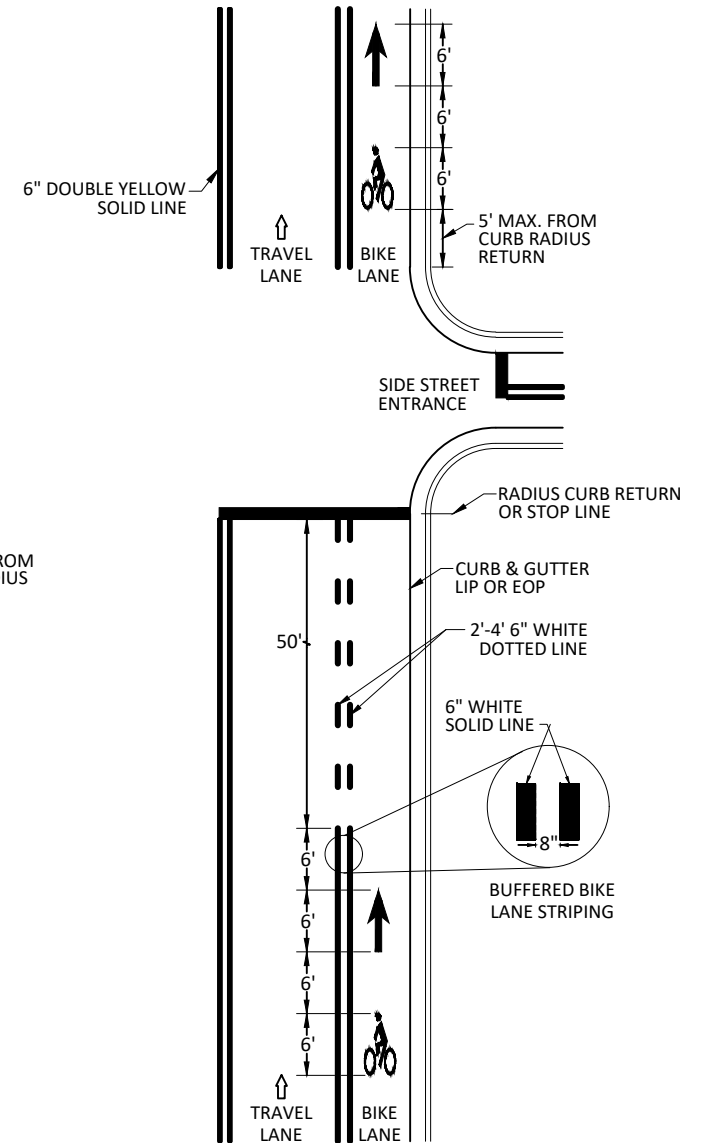


DETAIL 3
BIKE LANE MARKING PLACEMENT
AT INTERSECTION
N.T.S.


LATEST REVISION 2024	BICYCLE PAVEMENT MARKINGS, CONT.	STANDARD DETAIL
	CITY OF WEST PALM BEACH - ENGINEERING SERVICES	PM-2

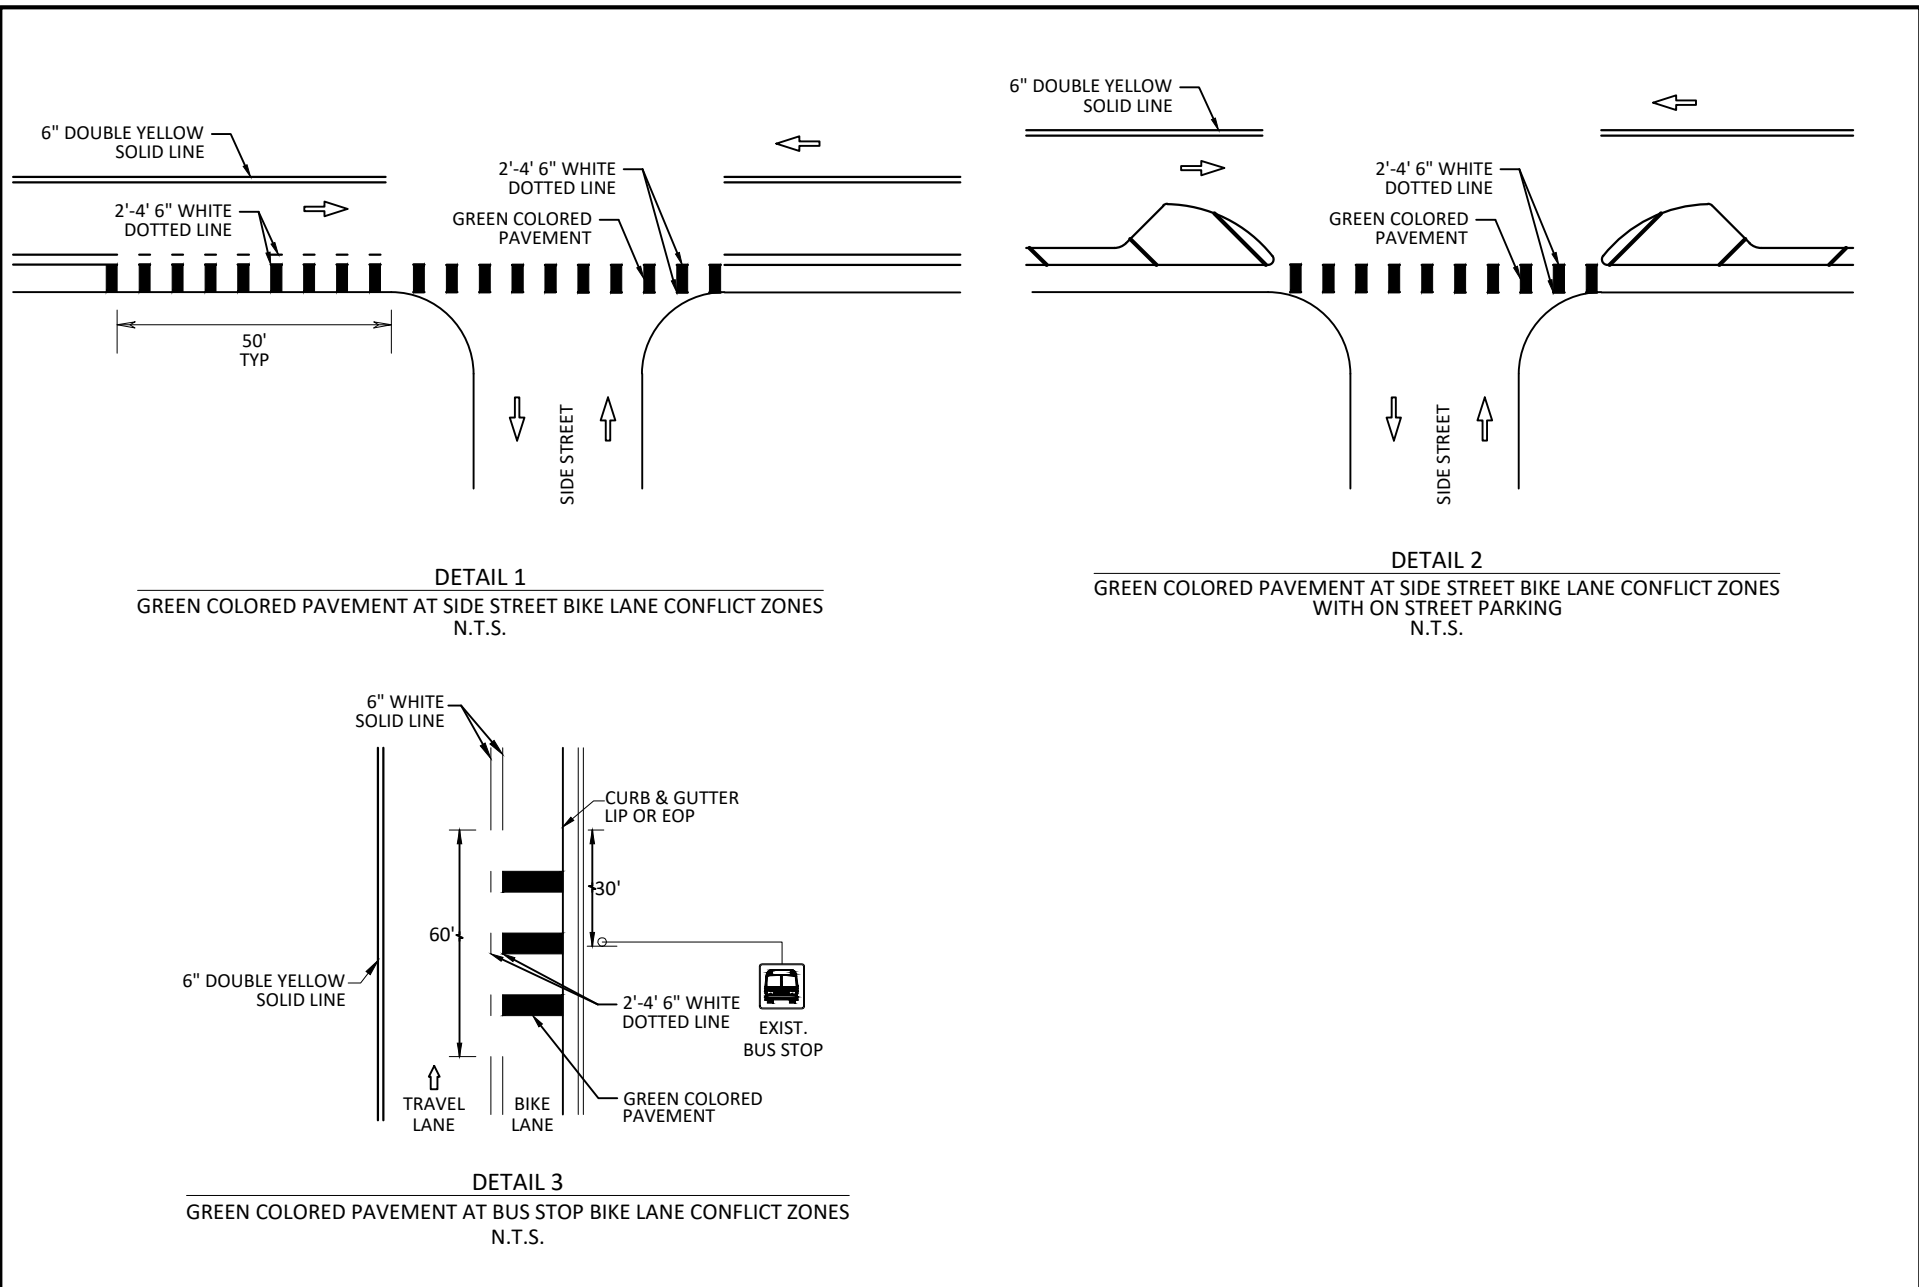


LATEST REVISION 2024	BICYCLE PAVEMENT MARKINGS, CONT.	STANDARD DETAIL
	CITY OF WEST PALM BEACH - ENGINEERING SERVICES	PM-3

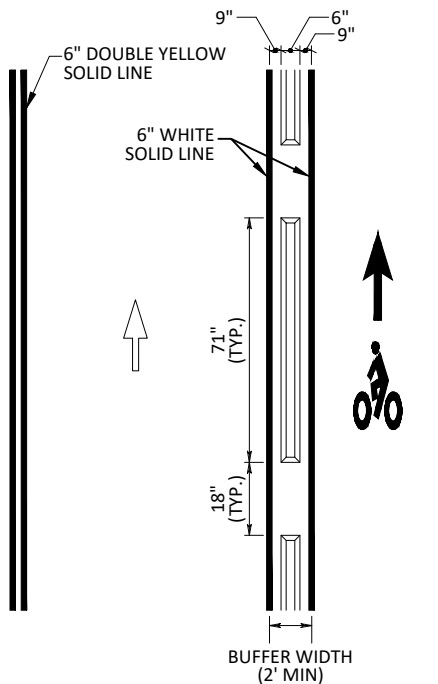

DETAIL 1
MINI PARKING BUMPER AT BUFFERED BIKE LANE
N.T.S.

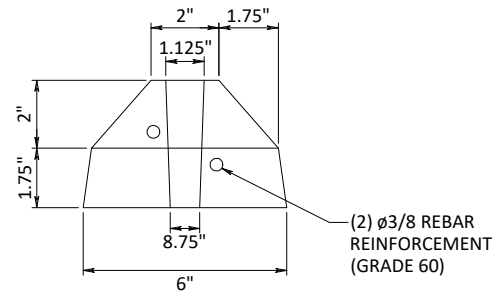


DETAIL 2
CROSS SECTION OF MINI PARKING BUMPER
N.T.S.

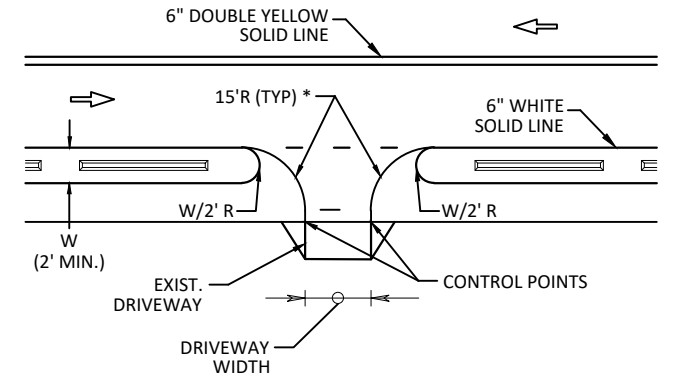

* GUIDELINES FOR REFERENCE ONLY

DETAIL 3
USE AT EXISTING DRIVEWAY OPENINGS
N.T.S.

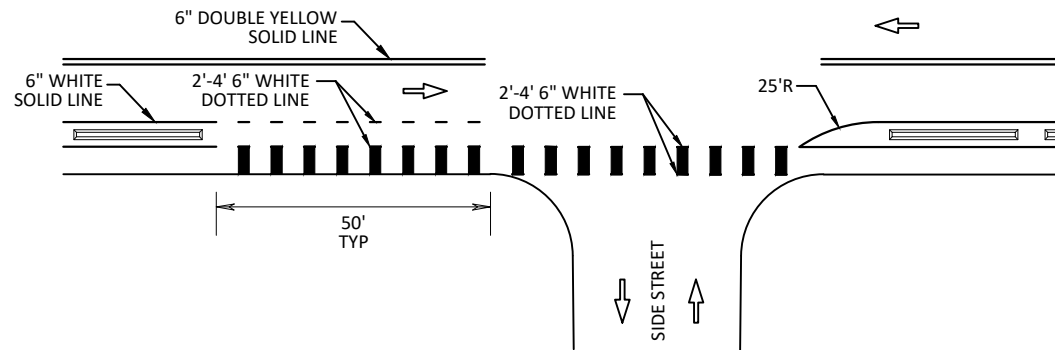


DETAIL 4
USE AT EXISTING SIDESTREETS
N.T.S.

MINI PARKING BUMPER INSTALLATION NOTES:

1. INSTALL STRIPED BUFFER
2. INSTALL MINI PARKING BUMBERS AT 18" SPACING
3. INSTALL MINI PARKING BUMBERS PARALLEL TO TRAVEL LANE
4. INSTALL ADJACENT TO GENERAL PURPOSE LANE
5. INSTALL IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATION

LATEST REVISION 2024	BICYCLE PAVEMENT MARKINGS, CONT.	STANDARD DETAIL
	CITY OF WEST PALM BEACH - ENGINEERING SERVICES	PM-4

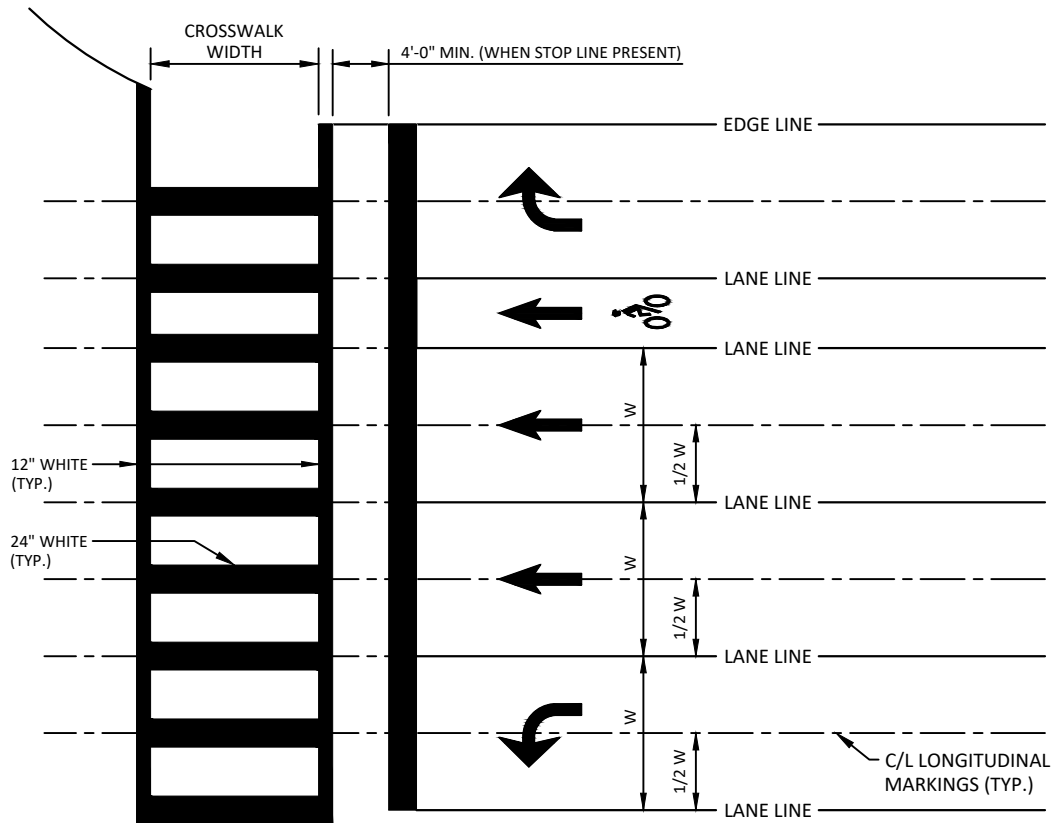

NOTES:

1. FOR CROSSWALK WIDTH, EXCEED WITH OF THE ADJACENT SIDEWALK, BUT DO NOT MAKE WIDTH LESS THAN 6' FOR INTERSECTION CROSSWALKS AND 10' FOR MIDBLOCK CROSSWALKS. MEASURE WIDTH FROM THE INSIDE OF THE TRANSVERSE CROSSWALK MARKINGS.
2. WHEN THE SPECIAL EMPHASIS CROSSWALK IS NOT PERPENDICULAR TO THE LANE LINES, MAKE THE LONGITUDINAL MARKINGS PARALLEL TO THE LANE LINES.
3. ALL CROSSWALKS SHALL COMPLY TO THIS STANDARD.

STANDARD CROSSWALK PAVEMENT MARKINGS DETAIL

N.T.S.

LATEST REVISION 2025	STANDARD CROSSWALK PAVEMENT MARKINGS	STANDARD DETAIL
	CITY OF WEST PALM BEACH - ENGINEERING SERVICES	PM-5